
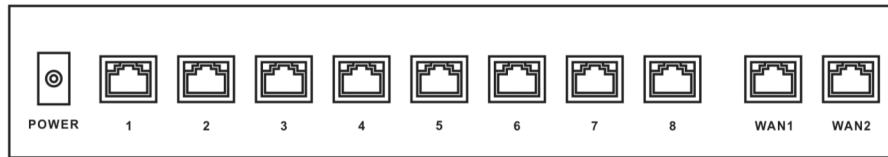


◆ ◆ ◆ ◆ 8-Port 10/100+2-Port 10/100/1000Mb Ethernet Switch

Panel Diagram

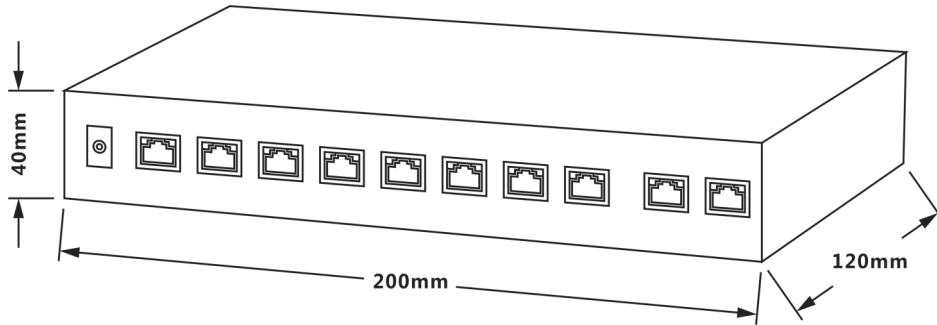

Instruction:

1. Front board have 10 ports, Provide 1~8 port: 10/100Mbps downlink PoE Ethernet Ports;
WAN1/WAN2 port: 10/100M/1000Mbps downlink Ethernet Ports
2. LED Indicator State:
POE: 8 green light indicates that the POE is power on;
Ethernet: 8 yellow light indicates that the Ethernet Link and Act;

8-Port 10/100+2-Port 10/100/1000Mb Ethernet Switch




10/100/1000Mbps

User' s Manual

◆ ◆ ◆ ◆ 8-Port 10/100+2-Port 10/100/1000Mb Ethernet Switch

PoE Splitter

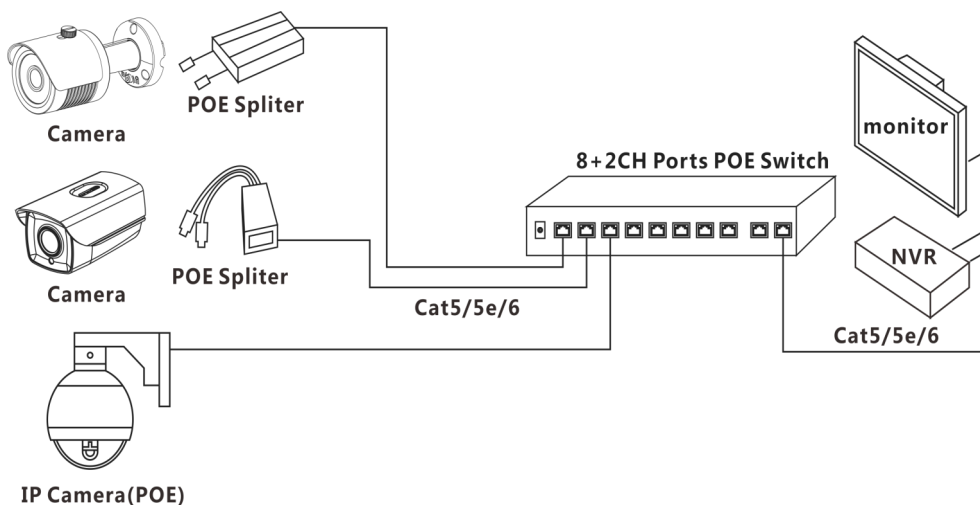

◆ **Features**

- ◆ 8x 10/100Mbps downlink PoE Ethernet Ports,
- ◆ Each of 8 ports all support IEEE802.3 af/at;
- ◆ Maximum power per port:30W;
- ◆ Maximum PoE power :120W/(Port 1 to Port 8);
- ◆ Auto detect powered device (PD);
- ◆ Hardware based 10/100/1000Mbps Auto-Negotiation and Auto MDI/ MDI-X;
- ◆ Flow control for Full Duplex operation and back pressure for Half Duplex operation;

◆ ◆ ◆ ◆ 8-Port 10/100+2-Port 10/100/1000Mb Ethernet Switch

◆ **Specification**

Item		Description
Power	Power Adapter Voltage	Input180-240V/AC 50-60Hz Output 48V/DC
	Consumption	100W
Network Connector	Network Port	1~8 port :10/100Mbps POE Ethernet port
	Network Port	WAN1/WAN2 port :10/100/1000Mbps
	Transmission Distance	1~8 port: 100m
	Transmission Distance	WAN1/WAN2 port: 100m
	Transmission Medium	Cat5/5e/6 standard network cable
Network Switch	Network Standard	IEEE802.3/10BASE-T Ethernet
		IEEE802.3u/100BASE-TX Ethernet
		IEEE802.3x Flow Control, IEEE802.3az
	Maximum Frame Size	1536 Bytes
	MAC address list	2K
PoE Standard	IEEE802.3af/at	
Power Over Ethernet	PoE Power Supply Type	End-Span(1/2+;3/6-)
	PoE Power Consumption	af, (every port)
LED Status Indicator	POE Ethernet	POE: 8 green light indicates that the POE is power on;
		Ethernet: 8 yellow light indicates that the Ethernet Link and Act;
Environmental	Working temperature	0°C~55°C
	Relative Humidity	5-95%
	Storage temperature	-40°C~70°C
Mechanical	Dimension (L x W x H) mm	200*120*40
	Material	Galvanized sheet
	Color	Black
	Weight	564g
Stability	MTBF	>30000h